



# APD 825 M

Mitsubishi

D'+' &'



ISO8528

GC ; ) &-

SZUTEST

GC - \$\$\$%

CE

2000/14/EC

&\$\$\$#( #

z) \$' z'ž 'D:

	"	kw	"	kw	Amp
400/230	825,00	660,00	750,00	600,00	1084,00

fP GDE

GC ; ) &

fDF DE

%\$!

%

%&

GC " \$(\*"

ž&(

GC

## Standard Specifications

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Fuel tank under the base frame
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation

TRANSFER SWITCH

# APD 825 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S6R2-PTAA
		% \$ \$ ' "# "
		710,00 kw [951,00HP]
	L	29,960
	"	170X220
		14:1
	fl # 7	"# "
	L	1500
	fl 7	L
	L	94,00
	L	132,00
AbsorbedAirDischargeReSourceKey.Text	' # "	60,00
	' # "	726,00
		24 V d.c.
	Load	% \$ \$ i
	# "	
		156,70

		ECO40VL/4
	Hz	50
	"	800,00
7 cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 825 M	6360,00	4100,00	1800,00	2200,00	1300,00
		fl 7		fl 7	
	"	"	"	"	L
MS 86	7680	5350	1800	2530	1300

D+' &'

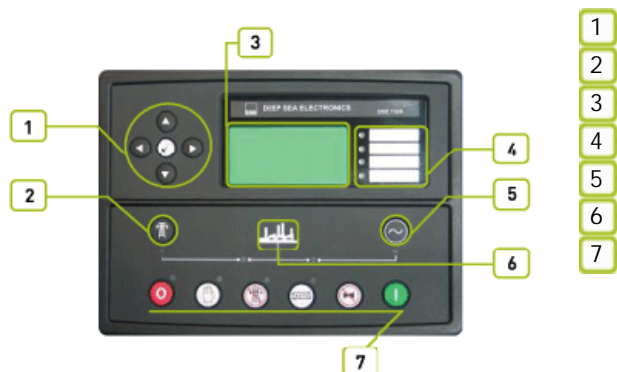

**Предложим лучшие условия поставки с официальной гарантией на оборудование и сервис. Узнайте больше на [www.umin.su](http://www.umin.su)**



# APD 825 M

Mitsubishi

D+ &



f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B\*\*\$-\$)

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&)(, t

f&%) +t

f&% \$t


GA 8

" % , ! & \* ( " & ( \$ ) " z " z " ! & + " " z "

# APD 825 M

Mitsubishi

D+ &

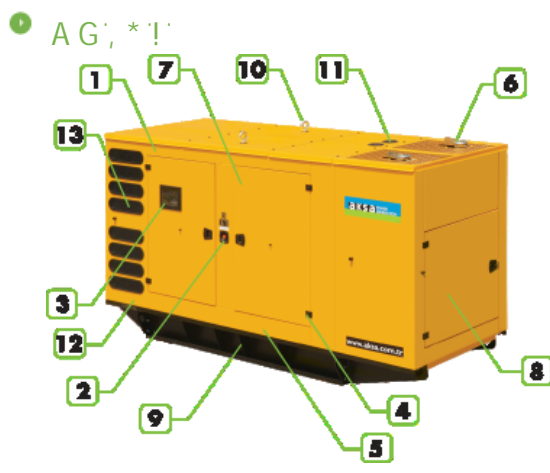

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1800
fl "L	"	5350
fl "L	"	2530
	L	1300

Контактная информация дилера:

**ЮМИН – ГАРАНТИЯ НАДЕЖНОГО ЭНЕРГОСНАБЖЕНИЯ  
ВАШЕГО ОБЪЕКТА**

**+7 495 255-22-44**

**info@umin.su • www.umin.su**

**Адрес парка техники: г. Москва, пос. Марушкинское, квартал 8**  
 ООО "ЮМИН" ИНН / КПП 7724389338 / 772401001, ОГРН 5167746294470  
 Юридический адрес: 115551, г. Москва, пр-д Шипиловский, 41, корп. 2